

MMBT3904T TRANSISTOR (NPN)

FEATURES

Power dissipation

$$P_{CM}: 0.15 \text{ W (Tamb=25°C)}$$

Collector current

$$I_{CM}: 0.2 \text{ A}$$

Collector-base voltage

$$V_{(BR)CBO}: 60 \text{ V}$$

Operating and storage junction temperature range

$$T_J, T_{stg}: -55°C \text{ to } +150°C$$

SOT-523



1. BASE
2. EMITTER
3. COLLECTOR

MARKING:1N

ELECTRICAL CHARACTERISTICS (Tamb=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=10\mu A, I_E=0$	60			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=1mA, I_B=0$	40			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=10\mu A, I_C=0$	6			V
Collector cut-off current	I_{CBO}	$V_{CB}=30V, I_E=0$			0.05	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=5V, I_C=0$			0.05	μA
DC current gain	$h_{FE(1)}$	$V_{CE}=1V, I_C=0.1mA$	40			
	$h_{FE(2)}$	$V_{CE}=1V, I_C=1mA$	70			
	$h_{FE(3)}$	$V_{CE}=1V, I_C=10mA$	100		300	
	$h_{FE(4)}$	$V_{CE}=1V, I_C=50mA$	60			
	$h_{FE(5)}$	$V_{CE}=1V, I_C=100mA$	30			
Collector-emitter saturation voltage	$V_{CE(sat)1}$	$I_C=10mA, I_B=1mA$			0.2	V
	$V_{CE(sat)2}$	$I_C=50mA, I_B=5mA$			0.3	V
Base-emitter saturation voltage	$V_{BE(sat)1}$	$I_C=10mA, I_B=1mA$	0.65		0.85	V
	$V_{BE(sat)2}$	$I_C=50mA, I_B=5mA$			0.95	V
Transition frequency	f_T	$V_{CE}=20V, I_C=10mA, f=100MHz$	300			MHz
Collector output capacitance	C_{ob}	$V_{CB}=5V, I_E=0, f=1MHz$			4	pF
Noise figure	NF	$V_{CE}=5V, I_C=0.1mA, f=1MHz, R_g=1K\Omega$			5	dB
Delay time	t_d	$V_{CC}=3V, V_{BE}=0.5V$ $I_C=10mA, I_{B1}=1mA$			35	nS
Rise time	t_r				35	nS
Storage time	t_S	$V_{CC}=3V, I_C=10mA$ $I_{B1}=I_{B2}=1mA$			200	nS
Fall time	t_f				50	nS

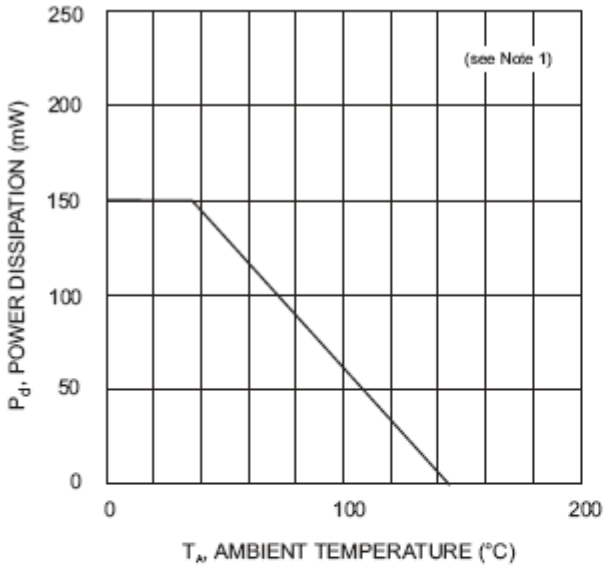


Fig. 1, Power Derating Curve

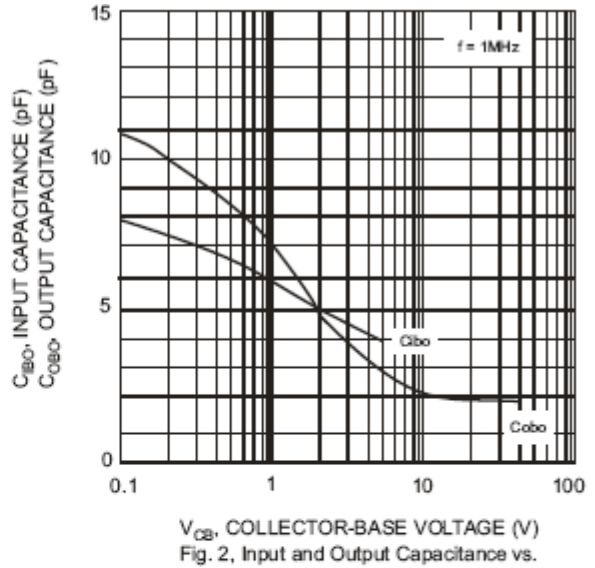


Fig. 2, Input and Output Capacitance vs. Collector-Base Voltage

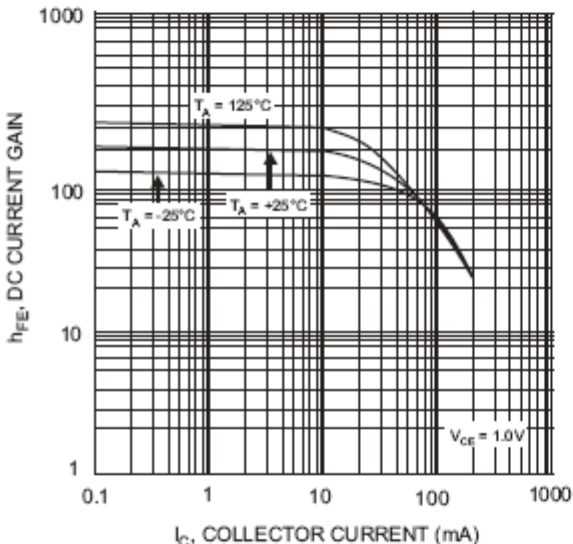


Fig. 3, Typical DC Current Gain vs. Collector Current

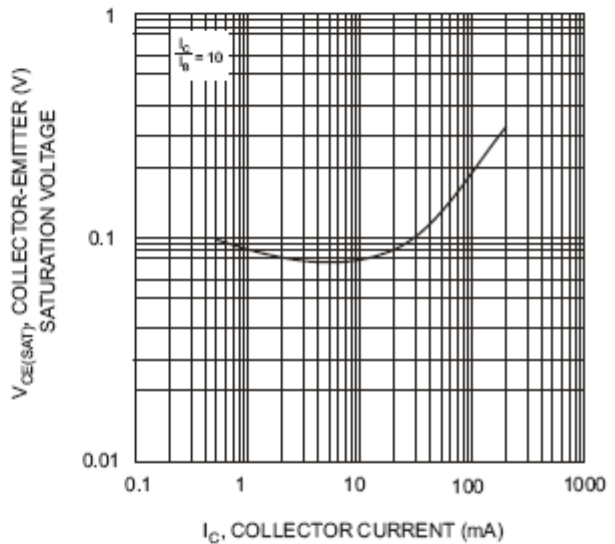


Fig. 4, Typical Collector-Emitter Saturation Voltage vs. Collector Current

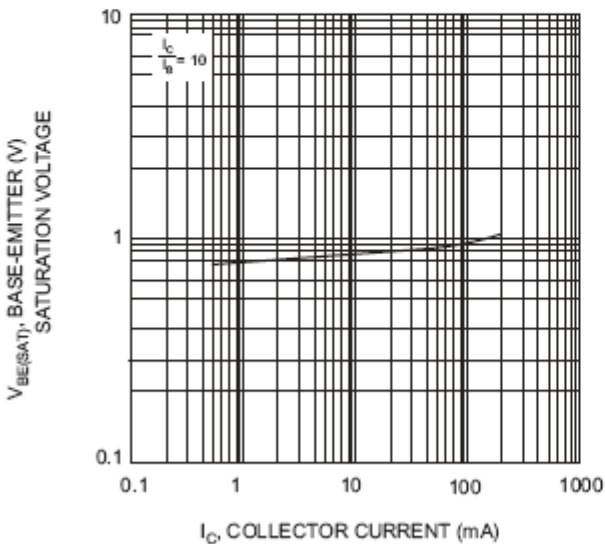


Fig. 5, Typical Base-Emitter Saturation Voltage vs. Collector Current