


AUTOMOTIVE RECTIFIER

FEATURES

- Low leakage
- Low forward voltage drop
- High current capability
- High forward surge current capability

MECHANICAL DATA

- Case: transfer molded plastic
- Epoxy: UL94V - 0 rate flame retardant.
- Polarity: Color ring denotes cathode end.
- Lead: Plated slug, solderable per MIL - STD - 202E method 208C
- Mounting position: Any
- Weight: 0.064 ounce, 1.82gram

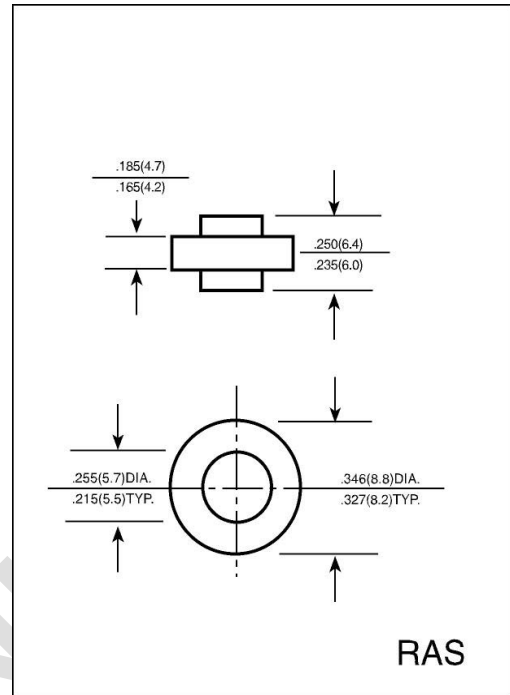

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single phase, half wave, 60Hz, resistive or inductive load.
- For capacitive load derate current by 20%

	SYMBOLS	RAS 2505	RAS 251	RAS 252	RAS 254	RAS 256	RAS 258	RAS 2510	UNIT	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts	
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts	
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts	
Maximum Average Forward Rectified Current, at $T_C = 125^\circ C$	$I_{(AV)}$	25.0							Amps	
Peak Forward Surge Current 8.3ms single half sine - wave superimposed on rated load (JEDEC method)	I_{FSM}	500							Amps	
Maximum Instantaneous Forward Voltage at 25 A	V_F	1.0							Volts	
Maximum DC Reverse Current at rated DC blocking voltage	I_R	$T_A = 25^\circ C$	5.0							μA
		$T_C = 100^\circ C$	250							
Typical Thermal Resistance	$R_{\theta JC}$	1.0							$^\circ C/W$	
Operating and Storage Temperature Range	T_J, T_{STG}	(-65 to +175)							$^\circ C$	
Polarity and voltage denotion color band		Red	Yellow	Silver	Orange	Green	Blue	Violet		

NOTES:

1. Enough heatsink must be considered in application.

FIG.1-TYPICAL FORWARD CURRENT
DERATING CURVE

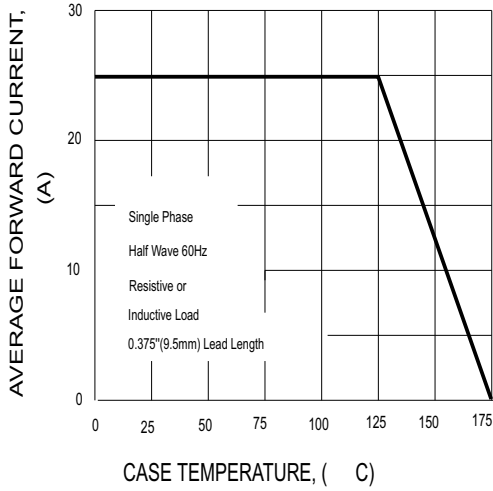


FIG.2-MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT

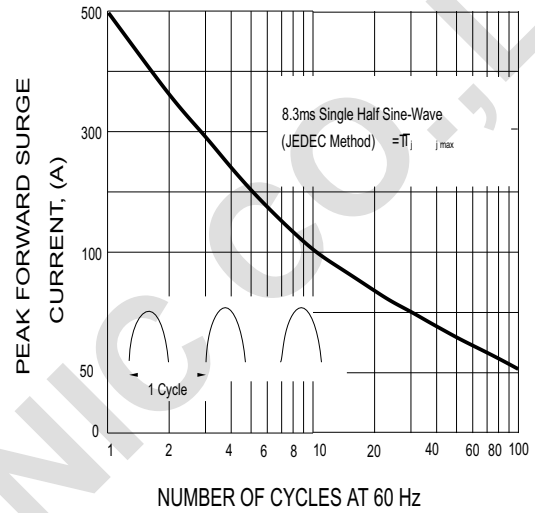


FIG.3-TYPICAL INSTANTANEOUS
FORWARD CHARACTERISTICS

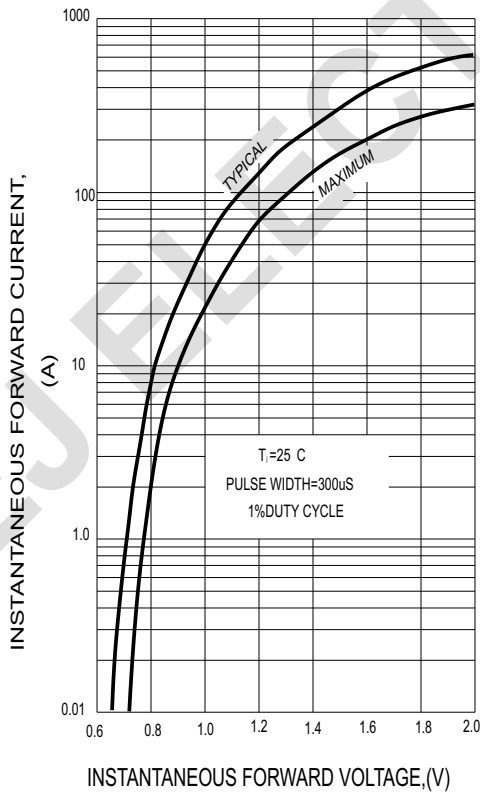


FIG.4. FORWARD POWER DISSIPATION

