

WEJ78L05 Three-terminal positive voltage regulator

FEATURES

Maximum Output current

I_{OM} : 0.1 A

Output voltage

V_o : 5 V

Operating and storage junction temperature range


T_J, T_{stg} : -55°C to +150°C

SOT-23-3L

1. OUT

2. IN

3. GND

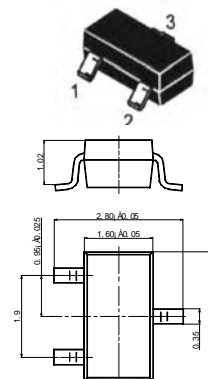


ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Units
Input Voltage	V_I	30	V
Operating Junction Temperature Range	T_{OPR}	0~+125	°C
Storage Temperature Range	T_{STG}	-55~+150	°C

ELECTRICAL CHARACTERISTICS ($V_I=10V, I_o=40mA, 0^\circ C < T_J < 125^\circ C, C_1=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_o	$T_J=25^\circ C$	4.8	5.0	5.2	V
		$7V \leq V_I \leq 20V, I_o=1mA \sim 40mA$	4.75	5.0	5.25	V
		$7V \leq V_I \leq V_{MAX}, I_o=1mA \sim 70mA$	4.75	5.0	5.25	V (note)
Load Regulation	ΔV_o	$T_J=25^\circ C, I_o=1mA \sim 100mA$		11	60	mV
		$T_J=25^\circ C, I_o=1mA \sim 40mA$		5.0	30	mV
Line regulation	ΔV_o	$7V \leq V_I \leq 20V, T_J=25^\circ C$		32	150	mV
		$8V \leq V_I \leq 20V, T_J=25^\circ C$		26	100	mV
Quiescent Current	I_q	$25^\circ C$		3.8	6	mA
Quiescent Current Change	ΔI_q	$8V \leq V_I \leq 20V$			1.5	mA
	ΔI_q	$1mA \leq V_I \leq 40mA$			0.1	mA
Output Noise Voltage	V_N	$10Hz \leq f \leq 100KHz$		42		uV
Ripple Rejection	RR	$8V \leq V_I \leq 18V, f=120Hz, T_J=25^\circ C$	41	80		dB
Dropout Voltage	V_d	$T_J=25^\circ C$		1.7		V

TYPICAL APPLICATION

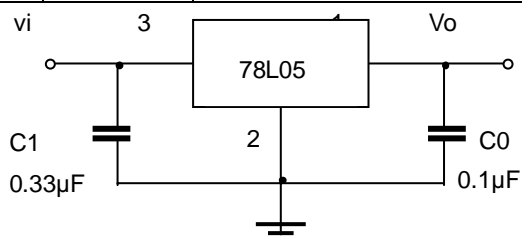

Note 1: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as Possible to the regulators.